

HEAD OFFICE

6, Pangyo-ro 319beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, 463-400 Rep. of KOREA
Tel: +82.70.7147.8753 Fax: +82.31.8018.3740
<http://hanwha-security.com>

Hanwha Techwin America

500 Frank W. Burr Blvd. Suite 43 Teaneck, NJ 07666
Toll Free: +1.877.213.1222
Direct: +1.201.325.6920
Fax: +1.201.373.0124
www.hanwhasecurity.com

Hanwha Techwin Europe

Heriot House, Heriot Road, Chertsey, Surrey, KT16 9DT, United Kingdom
Tel: +44.1932.57.8100
Fax: +44.1932.57.8101
www.hanwha-security.eu

Hanwha Techwin Tianjin

No.11 Weiliu Rd., Micro-electronic Industrial Park,
Jingang Road Tianjin 300385, China
Tel: +86.22.2388.7788 (8700)
www.hanwha-security.cn

Hanwha Techwin Middle East FZE

JAFZA View 18, 20th floor, office 2001, 2002, 2003,
Downtown Jebel Ali, Dubai, United Arab Emirates
<http://hanwha-security.com>

Hanwha Techwin Singapore Branch

4 Shenton Way, #15-06, SGX Centre 2, Singapore, 068807
Tel: +65.6221.7512
Fax: +65.6227.9337
<http://hanwha-security.com>

Hanwha Techwin Russia Office

40/4, Bolshaya Ordynka str., Moscow, Russia, 119017
Tel: +7.499.750.17.30
www.hanwha-security.eu/ru/

© 2019 Hanwha Techwin Co., Ltd. All rights reserved.

DESIGN AND SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

Under no circumstances, this document shall be reproduced, distributed or changed,
partially or wholly, without formal authorization of Hanwha Techwin Co., Ltd.

* Wisenet is the proprietary brand of Hanwha Techwin, formerly known as Samsung Techwin.

M.H-1906



WISeNET Q series
2MP/5MP cameras

EDITION 06-2019



High quality cameras offering cost effective solutions

The Q series cameras are affordable products that offer essential features in creating a safe and secure environment. The Q series delivers sharp and clear image quality in 5MP and 2MP, ideal in securing small to medium sized applications such as retail, banking and offices.

- Compact design with affordable price
- 5MP & 2MP resolution
- Framerate Max. 30fps
- WDR 120dB
- WiseStream II
- Intelligent video analytics
- IR viewable length up to 30m
- Hallway view (Rotate 90°/270°)
- Micro SD/SDHC/SDXC memory slot
- Video output CVBS, PoE



5MP and 2MP resolutions

The Wisenet Q series offers two resolutions options to give you the freedom to choose the camera that best fits your security needs. The 5MP cameras can support up to 30fps, providing real-time video with 2592 x 1944 resolution and up to 15fps of WDR performance, providing crisp and vivid monitoring.



Various lens options

Fixed Lens

The Wisenet Q series fixed-lens models are available with focal lengths of 2.8mm, 4.0mm and 6.0mm. The 2.8mm lens is available if you prefer a wide-angle view. If an area to monitor is located further away from the camera, the 6.0mm lens can be utilized.



Wide range of indoor & outdoor cameras

	BULLET		DOME		VANDAL DOME		FLATEYE
	Fixed IR	V/F IR	Fixed IR	V/F IR	Fixed IR	V/F IR	
5MP	 QNO-8030R / 8020R / 8010R	 QNO-8080R	 QND-8030R / 8020R  QND-8010R	 QND-8080R	 QNV-8030R / 8020R  QNV-8010R	 QNV-8080R	 QNE-8021R / 8011R
2MP	 QNO-6032R / 6022R / 6012R	 QNO-6082R  QNO-6072R	 QND-6032R / 6022R  QND-6012R	 QND-6082R / 6072R	 QNV-6032R / 6022R  QNV-6012R	 QNV-6082R / 6072R	

Varifocal Lens

The 3.2 ~ 10mm (3.1x) varifocal lens, created by Hanwha Techwin's own advanced technology, offers greater flexibility in the field of view. The motorized zoom option provides quick and easy megapixel focus using the simple focus feature.



Enhanced video analytics

The Wisenet Q series cameras are equipped with a wide range of Intelligent Video Analytics features, helping users detect different types of incidents and have full situational awareness of their facility.




Defocus Detection

Create an alarm if the focus is blurred.



Tampering Detection

Create an alarm if the camera lens is covered or an unauthorized movement changes the field of view.

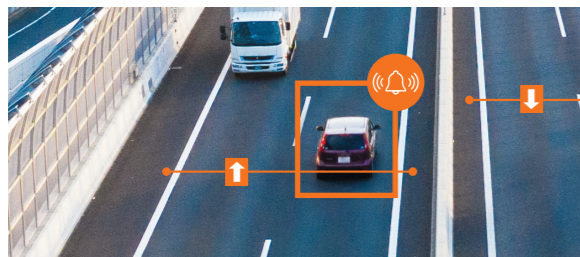

Directional Detection

Create an alarm if an object is detected in the preset direction.




Motion Detection

Create an alarm if movement is detected in a designated area.



Virtual Line

Create an alarm if an object is detected passing through a virtual line.

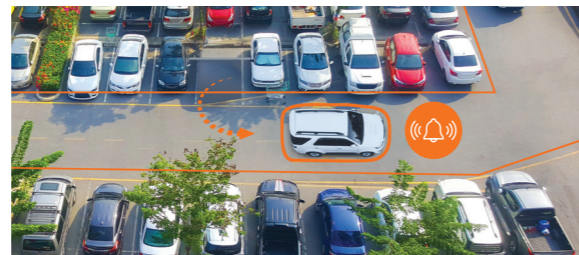

Enter / Exit

Create an alarm if an object enters or exits a designated area.

Analog video output for easier installation

The Wisenet Q series cameras support analog video (CVBS) output for easier installation. During the installation, a monitor can be connected to the monitor port to adjust and configure the viewing angle and the focus.



Improve bandwidth by up to 99% using WiseStreamII

Using WiseStream II, Hanwha Techwin's own video compression technology, Wisenet Q series cameras reduces data by up to 99% compared to H.264 technology, when combined with H.265 compression. System costs, such as network infrastructure and data storage, are also greatly reduced without comprising image quality.





WiseStream II OFF : 7160kbps
WiseStream II ON : 74kbps



WiseStream II OFF : 7260kbps
WiseStream II ON : 1817kbps

Hallway view for monitoring vertical shaped areas

In a vertical shaped environment, such as a store aisle, traditional horizontal shaped cameras waste bandwidth and storage on unnecessary edges. The Hallway view creates 3 : 4 and 9 : 16 ratio video which is vertically oriented and maximizes image quality in a narrow environment.

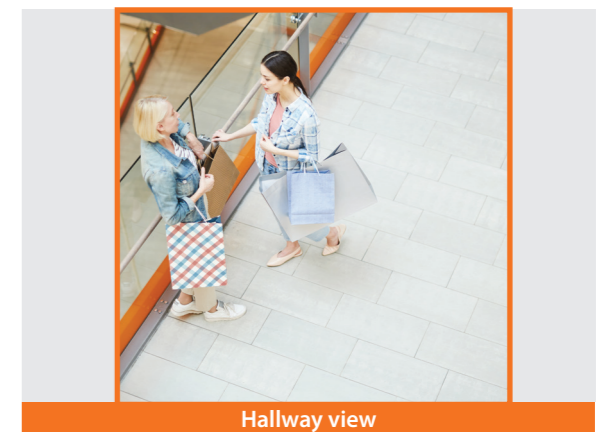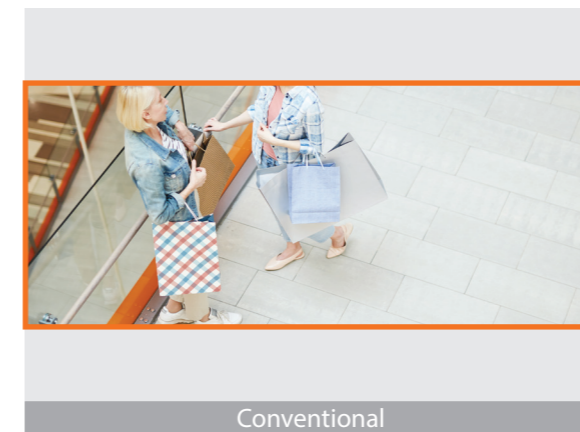

Product Specifications



QNO-8080R
5MP IR Bullet



QNO-8030R
5MP IR Bullet



QNO-8020R
5MP IR Bullet



QNO-8010R
5MP IR Bullet



QND-8080R
5MP IR Dome



QND-8030R
5MP IR Dome



QND-8020R
5MP IR Dome



QND-8010R
5MP IR Dome



QNV-8080R
5MP IR Vandal Dome



QNV-8030R
5MP IR Vandal Dome

Imaging Device	1/2.8" 5MP CMOS	1/2.8" 5MP CMOS	1/2.8" 5MP CMOS	1/2.8" 5MP CMOS	1/2.8" 5MP CMOS
Min. Illumination	Color : 0.15Lux (F1.6) B/W : 0Lux (IR LED on)	Color : 0.15Lux (F2.0) B/W : 0Lux (IR LED on)	Color : 0.15Lux (F1.6) B/W : 0Lux (IR LED on)	Color : 0.15Lux (F2.0) B/W : 0Lux (IR LED on)	Color : 0.15Lux (F1.6) B/W : 0Lux (IR LED on)
Video Output	CVBS 1.0Vp-p	CVBS 1.0Vp-p	CVBS 1.0Vp-p	CVBS 1.0Vp-p	CVBS 1.0Vp-p
Focal Length	3.2~10mm (3.1x) motorized varifocal	6.0mm fixed	4.0mm fixed	2.8mm fixed	3.2~10mm (3.1x) motorized varifocal
Angular Field of View	H : 100.3°(Wide)~31.2°(Tele) / V : 72.3°(Wide)~23.5°(Tele) / D : 133.1°(Wide)~38.8°(Tele)	H : 49.4°/V : 37.4°/D : 61.0°	H : 79.8°/V : 58.1°/D : 105.9°	H : 104.7°/V : 76.5°/D : 136.0°	H : 100.3°(Wide)~31.2°(Tele) / V : 72.3°(Wide)~23.5°(Tele) / H : 133.1°(Wide)~38.8°(Tele)
Pan / Tilt / Rotate	-	-	-	-	0°~350° / 0°~67° / 0°~355°
IR Viewable Length	30m (98.43ft)	30m (98.42ft)	25m (82.02ft)	20m (65.62ft)	20m (65.62ft)
Day & Night	Auto (ICR)	Auto (ICR)	Auto (ICR)	Auto (ICR)	Auto (ICR)
Wide Dynamic Range	120dB	120dB	120dB	120dB	120dB
Digital Noise Reduction	SSNR	SSNR	SSNR	SSNR	SSNR
Analytics	Intelligent analytics	Intelligent analytics	Intelligent analytics	Intelligent analytics	Intelligent analytics
Alarm I/O	1 / 1	1 / 1	1 / 1	1 / 1	1 / 1
Audio I/O	-	-	-	-	-
Video Compression	H.265, H.264, MJPEG	H.265, H.264, MJPEG	H.265, H.264, MJPEG	H.265, H.264, MJPEG	H.265, H.264, MJPEG
Resolution / Max. Frame Rate	5MP / 30fps	5MP / 30fps	5MP / 30fps	5MP / 30fps	5MP / 30fps
WiseStream	WiseStream II	WiseStream II	WiseStream II	WiseStream II	WiseStream II
Streaming	Up to 3 Profiles	Up to 3 Profiles	Up to 3 Profiles	Up to 3 Profiles	Up to 3 Profiles
Edge Storage	Micro SD/SDHC/SDXC	Micro SD/SDHC/SDXC	Micro SD/SDHC/SDXC	Micro SD/SDHC/SDXC	Micro SD/SDHC/SDXC
Application Programming Interface	ONVIF profile S/G/T, SUNAPI, Wisenet open platform	ONVIF profile S/G/T, SUNAPI, Wisenet open platform	ONVIF profile S/G/T, SUNAPI, Wisenet open platform	ONVIF profile S/G/T, SUNAPI, Wisenet open platform	ONVIF profile S/G/T, SUNAPI, Wisenet open platform
Operating Temperature	-30°C ~ +55°C (-22°F ~ +131°F) * Start up above -20°C (-4°F)	-30°C ~ +55°C (-22°F ~ +131°F) * Start up above -20°C (-4°F)	-30°C ~ +55°C (-22°F ~ +131°F) * Start up above -20°C (-4°F)	-30°C ~ +55°C (-22°F ~ +131°F) * Start up above -20°C (-4°F)	-10°C ~ +50°C (+14°F ~ +122°F)
Certification	IP66, IK10	IP66, IK10	IP66, IK10	IP66, IK10	-
Power Consumption	PoE : Max 9.5W, typical 7.3W	PoE : Max 7.5W, typical 6.1W	PoE : Max 7.5W, typical 6.1W	PoE : Max 7.5W, typical 6.1W	PoE : Max 8.9W, typical 6.6W
Dimensions (WxHxD) / Weight	Ø91 x 322.9mm (Ø3.58" x 12.71") 1190g (2.624 lb)	Ø70.0 x 246.0mm (Ø2.76" x 9.69") 680g (1.499 lb)	Ø70.0 x 246.0mm (Ø2.76" x 9.69") 680g (1.499 lb)	Ø70.0 x 246.0mm (Ø2.76" x 9.69") 680g (1.499 lb)	Ø120.3 x 102.0mm (Ø4.74" x 4.02") 430g (0.948 lb)
Additional Features	Hallway View	Hallway View	Hallway View	Hallway View	Hallway View

Imaging Device	1/2.8" 5MP CMOS	1/2.8" 5MP CMOS	1/2.8" 5MP CMOS	1/2.8" 5MP CMOS	1/2.8" 5MP CMOS
Min. Illumination	Color : 0.15Lux (F2.0) B/W : 0Lux (IR LED on)	Color : 0.15Lux (F1.6) B/W : 0Lux (IR LED on)	Color : 0.15Lux (F2.0) B/W : 0Lux (IR LED on)	Color : 0.15Lux (F1.6) B/W : 0Lux (IR LED on)	Color : 0.15Lux (F2.0) B/W : 0Lux (IR LED on)
Video Output	CVBS 1.0Vp-p	CVBS 1.0Vp-p	CVBS 1.0Vp-p	CVBS 1.0Vp-p	CVBS 1.0Vp-p
Focal Length	6.0mm fixed	4.0mm fixed	2.8mm fixed	3.2~10mm (3.1x) motorized varifocal	6.0mm fixed
Angular Field of View	H : 49.4°/V : 37.4°/D : 61.0°	H : 79.8°/V : 58.1°/D : 105.9°	H : 104.7°/V : 76.5°/D : 136.0°	H : 100.3°(Wide)~31.2°(Tele) / V : 72.3°(Wide)~23.5°(Tele) / H : 133.1°(Wide)~38.8°(Tele)	H : 49.4°/V : 37.4°/D : 61.0°
Pan / Tilt / Rotate	0°~350° / 0°~67° / 0°~355°	0°~350° / 0°~67° / 0°~355°	0°~350° / 0°~67° / 0°~355°	0°~350° / 0°~67° / 0°~355°	0°~350° / 0°~67° / 0°~355°
IR Viewable Length	20m (65.62ft)	20m (65.62ft)	20m (65.62ft)	30m (98.42ft)	30m (98.42ft)
Day & Night	Auto (ICR)	Auto (ICR)	Auto (ICR)	Auto (ICR)	Auto (ICR)
Wide Dynamic Range	120dB	120dB	120dB	120dB	120dB
Digital Noise Reduction	SSNR	SSNR	SSNR	SSNR	SSNR
Analytics	Intelligent analytics	Intelligent analytics	Intelligent analytics	Intelligent analytics	Intelligent analytics
Alarm I/O	1 / 1	1 / 1	1 / 1	1 / 1	1 / 1
Audio I/O	-	-	-	-	-
Video Compression	H.265, H.264, MJPEG	H.265, H.264, MJPEG	H.265, H.264, MJPEG	H.265, H.264, MJPEG	H.265, H.264, MJPEG
Resolution / Max. Frame Rate	5MP / 30fps	5MP / 30fps	5MP / 30fps	5MP / 30fps	5MP / 30fps
WiseStream	WiseStream II	WiseStream II	WiseStream II	WiseStream II	WiseStream II
Streaming	Up to 3 Profiles	Up to 3 Profiles	Up to 3 Profiles	Up to 3 Profiles	Up to 3 Profiles
Edge Storage	Micro SD/SDHC/SDXC	Micro SD/SDHC/SDXC	Micro SD/SDHC/SDXC	Micro SD/SDHC/SDXC	Micro SD/SDHC/SDXC
Application Programming Interface	ONVIF profile S/G/T, SUNAPI, Wisenet open platform	ONVIF profile S/G/T, SUNAPI, Wisenet open platform	ONVIF profile S/G/T, SUNAPI, Wisenet open platform	ONVIF profile S/G/T, SUNAPI, Wisenet open platform	ONVIF profile S/G/T, SUNAPI, Wisenet open platform
Operating Temperature	-10°C ~ +50°C (+14°F ~ +122°F)	-10°C ~ +50°C (+14°F ~ +122°F)	-10°C ~ +50°C (+14°F ~ +122°F)	-30°C ~ +55°C (-22°F ~ +131°F) * Start up above -20°C (-4°F)	-30°C ~ +55°C (-22°F ~ +131°F) * Start up above -20°C (-4°F)
Certification	-	-	-	IP66, IK10	IP66, IK10
Power Consumption	PoE : Max 6.8W, typical 5.0W	PoE : Max 6.8W, typical 5.0W	PoE : Max 7.5W, typical 5.8W	PoE : Max 8.9W, typical 6.6W	PoE : Max 7.2W, typical 5.4W
Dimensions (WxHxD) / Weight	Ø110.6 x 89.5mm (Ø4.35" x 3.52") 360g (0.794 lb)	Ø110.6 x 89.5mm (Ø4.35" x 3.52") 360g (0.794 lb)	Ø110.6 x 89.5mm (Ø4.35" x 3.52") 360g (0.794 lb)	Ø137.0 x 106.1mm (Ø5.39" x 4.18") 700g (1.543 lb)	Ø120.3 x 91.7mm (Ø4.74" x 3.61") 510g (1.124 lb)
Additional Features	Hallway View	Hallway View	Hallway View	Hallway View	Hallway View

Product Specifications



QNV-8020R
5MP IR Vandal Dome



QNV-8010R
5MP IR Vandal Dome



QNE-8021R
5MP IR Flateye



QNE-8011R
5MP IR Flateye



QNO-6082R
2MP IR Bullet



QNO-6072R
2MP IR Bullet



QNO-6032R
2MP IR Bullet



QNO-6022R
2MP IR Bullet



QNO-6012R
2MP IR Bullet



QND-6082R
2MP IR Dome

Imaging Device	1/2.8" 5MP CMOS	1/2.8" 5MP CMOS	1/2.8" 5MP CMOS	1/2.8" 5MP CMOS	1/2.8" 2MP CMOS
Min. Illumination	Color : 0.15Lux (F1.6) B/W : 0Lux (IR LED on)	Color : 0.15Lux (F2.0) B/W : 0Lux (IR LED on)	Color : 0.15Lux (F1.6) B/W : 0Lux (IR LED on)	Color : 0.15Lux (F2.0) B/W : 0Lux (IR LED on)	Color : 0.095Lux (F1.6) B/W : 0Lux (IR LED on)
Video Output	CVBS 1.0Vp-p	CVBS 1.0Vp-p	-	-	CVBS 1.0Vp-p
Focal Length	4.0mm fixed	2.8mm fixed	4.0mm fixed	2.8mm fixed	3.2~10mm (3.1x) motorized varifocal
Angular Field of View	H : 79.8°/V : 58.1°/D : 105.9°	H : 104.7°/V : 76.5°/D : 136.0°	H : 80.1°/V : 58.0°/D : 105.8°	H : 104.4°/V : 76.7°/D : 136.1°	H : 109.0°(Wide)~33.2°(Tele) / V : 57.4°(Wide)~18.7°(Tele) / D : 132.0°(Wide)~38.0°(Tele) /
Pan / Tilt / Rotate	0°~350° / 0°~67° / 0°~355°	0°~350° / 0°~67° / 0°~355°	0°~350° / 0°~75° / 0°~360°	0°~350° / 0°~75° / 0°~360°	-
IR Viewable Length	25m (82.02ft)	20m (65.62ft)	20m (65.62ft)	20m (65.62ft)	30m (98.43ft)
Day & Night	Auto (ICR)	Auto (ICR)	Auto (ICR)	Auto (ICR)	Auto (ICR)
Wide Dynamic Range	120dB	120dB	120dB	120dB	120dB
Digital Noise Reduction	SSNR	SSNR	SSNR	SSNR	SSNR
Analytics	Intelligent analytics	Intelligent analytics	Intelligent analytics	Intelligent analytics	Intelligent analytics
Alarm I/O	1 / 1	1 / 1	-	-	1 / 1
Audio I/O	-	-	-	-	Selectable (mic in/line in) / -
Video Compression	H.265, H.264, MJPEG	H.265, H.264, MJPEG	H.265, H.264, MJPEG	H.265, H.264, MJPEG	H.265, H.264, MJPEG
Resolution / Max. Frame Rate	5MP / 30fps	5MP / 30fps	5MP / 30fps	5MP / 30fps	2MP / 30fps
WiseStream	WiseStream II	WiseStream II	WiseStream II	WiseStream II	WiseStream II
Streaming	Up to 3 Profiles	Up to 3 Profiles	Up to 3 Profiles	Up to 3 Profiles	Up to 3 Profiles
Edge Storage	Micro SD/SDHC/SDXC	Micro SD/SDHC/SDXC	Micro SD/SDHC/SDXC	Micro SD/SDHC/SDXC	Micro SD/SDHC/SDXC
Application Programming Interface	ONVIF profile S/G/T, SUNAPI, Wisenet open platform	ONVIF profile S/G/T, SUNAPI, Wisenet open platform	ONVIF profile S/G/T, SUNAPI, Wisenet open platform	ONVIF profile S/G/T, SUNAPI, Wisenet open platform	ONVIF profile S/G/T, SUNAPI, Wisenet open platform
Operating Temperature	-30°C ~ +55°C (-22°F ~ +131°F) * Start up above -20°C (-4°F)	-30°C ~ +55°C (-22°F ~ +131°F) * Start up above -20°C (-4°F)	-30°C ~ +55°C (-22°F ~ +131°F) * Start up above -20°C (-4°F)	-30°C ~ +55°C (-22°F ~ +131°F) * Start up above -20°C (-4°F)	-30°C ~ +55°C (-22°F ~ +131°F) * Start up above -20°C (-4°F)
Certification	IP66, IK10	IP66, IK10	IP67, IK10	IP67, IK10	IP66, IK10
Power Consumption	PoE : Max 7.2W, typical 5.4W	PoE : Max 7.5W, typical 5.8W	PoE : Max 7.4W, typical 5.5W	PoE : Max 7.4W, typical 5.5W	PoE : Max 7.4W, typical 5.4W 12VDC : Max 6.5W
Dimensions (WxHxD) / Weight	Ø120.3 x 91.7mm (Ø4.74" x 3.61") 510g (1.124 lb)	Ø120.3 x 91.7mm (Ø4.74" x 3.61") 510g (1.124 lb)	Ø125x87.35mm (Ø4.92" x 3.44") 645g (1.422 lb)	Ø125x87.35mm (Ø4.92" x 3.44") 645g (1.422 lb)	Ø78.0 x 259.8mm (Ø3.07" x 10.23") 900g (1.984 lb)
Additional Features	Hallway View	Hallway View	Hallway View	Hallway View	Hallway View

Imaging Device	1/2.8" 2MP CMOS	1/2.8" 2MP CMOS	1/2.8" 2MP CMOS	1/2.8" 2MP CMOS	1/2.8" 2MP CMOS
Min. Illumination	Color : 0.095Lux (F1.6) B/W : 0Lux (IR LED on)	Color : 0.1Lux (F2.0) B/W : 0Lux (IR LED on)	Color : 0.1Lux (F1.6) B/W : 0Lux (IR LED on)	Color : 0.1Lux (F2.0) B/W : 0Lux (IR LED on)	Color : 0.095Lux (F1.6) B/W : 0Lux (IR LED on)
Video Output	CVBS 1.0Vp-p	CVBS 1.0Vp-p	CVBS 1.0Vp-p	CVBS 1.0Vp-p	CVBS 1.0Vp-p
Focal Length	3.2~10mm (3.1x) manual varifocal	6mm fixed	4mm fixed	2.8mm fixed	3.2~10mm (3.1x) motorized varifocal
Angular Field of View	H : 109.0°(Wide)~33.2°(Tele) / V : 57.4°(Wide)~18.7°(Tele) / D : 132.0°(Wide)~38.0°(Tele) /	H : 52.8°/V : 30.3°/D : 60.4°	H : 87.6° / V : 46.4° / D : 104.5°	H : 113.74° / V : 61.5° / D : 134.45°	H : 109.0°(Wide)~33.2°(Tele) / V : 57.4°(Wide)~18.7°(Tele) / D : 132.0°(Wide)~38.0°(Tele) /
Pan / Tilt / Rotate	-	-	-	-	0°~350° / 0°~67° / 0°~355°
IR Viewable Length	30m (98.43ft)	30m (98.43ft)	25m (82.02ft)	20m (65.62ft)	20m (65.62ft)
Day & Night	Auto (ICR)	Auto (ICR)	Auto (ICR)	Auto (ICR)	Auto (ICR)
Wide Dynamic Range	120dB	120dB	120dB	120dB	120dB
Digital Noise Reduction	SSNR	SSNR	SSNR	SSNR	SSNR
Analytics	Intelligent analytics	Intelligent analytics	Intelligent analytics	Intelligent analytics	Intelligent analytics
Alarm I/O	1 / 1	1 / 1	1 / 1	1 / 1	1 / 1
Audio I/O	Selectable (mic in/line in) / -	Selectable (mic in/line in) / -	Selectable (mic in/line in) / -	Selectable (mic in/line in) / -	Built-in mic / -
Video Compression	H.265, H.264, MJPEG	H.265, H.264, MJPEG	H.265, H.264, MJPEG	H.265, H.264, MJPEG	H.265, H.264, MJPEG
Resolution / Max. Frame Rate	2MP / 30fps	2MP / 30fps	2MP / 30fps	2MP / 30fps	2MP / 30fps
WiseStream	WiseStream II	WiseStream II	WiseStream II	WiseStream II	WiseStream II
Streaming	Up to 3 Profiles	Up to 3 Profiles	Up to 3 Profiles	Up to 3 Profiles	Up to 3 Profiles
Edge Storage	Micro SD/SDHC/SDXC	Micro SD/SDHC/SDXC	Micro SD/SDHC/SDXC	Micro SD/SDHC/SDXC	Micro SD/SDHC/SDXC
Application Programming Interface	ONVIF profile S/G/T, SUNAPI, Wisenet open platform	ONVIF profile S/G/T, SUNAPI, Wisenet open platform	ONVIF profile S/G/T, SUNAPI, Wisenet open platform	ONVIF profile S/G/T, SUNAPI, Wisenet open platform	ONVIF profile S/G/T, SUNAPI, Wisenet open platform
Operating Temperature	-30°C ~ +55°C (-22°F ~ +131°F) * Start up above -20°C (-4°F)	-30°C ~ +55°C (-22°F ~ +131°F) * Start up above -20°C (-4°F)	-30°C ~ +55°C (-22°F ~ +131°F) * Start up above -20°C (-4°F)	-30°C ~ +55°C (-22°F ~ +131°F) * Start up above -20°C (-4°F)	-10°C ~ +55°C (+14°F ~ +131°F)
Certification	IP66, IK10	IP66, IK10	IP66, IK10	IP66, IK10	-
Power Consumption	PoE : Max 7.4W, typical 5.4W 12VDC : Max 6.5W	PoE : Max 7W, typical 5.2W 12VDC : Max 6.1W	PoE : Max 7W, typical 5.2W 12VDC : Max 6.1W	PoE : Max 7W, typical 5.2W 12VDC : Max 6.1W	PoE : Max 7.7W, typical 6W 12VDC : Max 6.5W
Dimensions (WxHxD) / Weight	Ø70.0 x 246.0mm (Ø2.76" x 9.69") 730g (1.609 lb)	Ø70.0 x 246.0mm (Ø2.76" x 9.69") 700g (1.543 lb)	Ø70.0 x 246.0mm (Ø2.76" x 9.69") 700g (1.543 lb)	Ø70.0 x 246.0mm (Ø2.76" x 9.69") 700g (1.543 lb)	Ø119.8 x 98.8mm (Ø4.72" x 3.89") 320g (0.705 lb)
Additional Features	Hallway View	Hallway View	Hallway View	Hallway View	Hallway View

Product Specifications



QND-6072R
2MP IR Dome



QND-6032R
2MP IR Dome



QND-6022R
2MP IR Dome



QND-6012R
2MP IR Dome



QNV-6082R
2MP IR Vandal Dome



QNV-6072R
2MP IR Vandal Dome



QNV-6032R
2MP IR Vandal Dome



QNV-6022R
2MP IR Vandal Dome




QNV-6012R
2MP IR Vandal Dome

Imaging Device	1/2.8" 2MP CMOS	1/2.8" 2MP CMOS	1/2.8" 2MP CMOS	1/2.8" 2MP CMOS	1/2.8" 2MP CMOS
Min. Illumination	Color : 0.095Lux (F1.6) B/W : 0Lux (IR LED on)	Color : 0.1Lux (F2.0) B/W : 0Lux (IR LED on)	Color : 0.1Lux (F1.6) B/W : 0Lux (IR LED on)	Color : 0.1Lux (F2.0) B/W : 0Lux (IR LED on)	Color : 0.095Lux (F1.6) B/W : 0Lux (IR LED on)
Video Output	CVBS 1.0Vp-p	CVBS 1.0Vp-p	CVBS 1.0Vp-p	CVBS 1.0Vp-p	CVBS 1.0Vp-p
Focal Length	3.2~10mm (3.1x) manual varifocal	6mm fixed	4mm fixed	2.8mm fixed	3.2~10mm (3.1x) motorized varifocal
Angular Field of View	H: 109.0°(Wide)~33.2°(Tele) / V: 57.4°(Wide)~18.7°(Tele) / D: 132.0°(Wide)~38.0°(Tele)	H: 52.8°/V: 30.3°/D: 60.4°	H: 87.6° / V: 46.4° / D: 104.5°	H: 113.74° / V: 61.5° / D: 134.45°	H: 109.0°(Wide)~33.2°(Tele) / V: 57.4°(Wide)~18.7°(Tele) / D: 132.0°(Wide)~38.0°(Tele)
Pan / Tilt / Rotate	0°~350° / 0°~67° / 0°~355°	0°~350° / 0°~67° / 0°~355°	0°~350° / 0°~67° / 0°~355°	0°~350° / 0°~67° / 0°~355°	0°~350° / 0°~67° / 0°~355°
IR Viewable Length	20m (65.62ft)	20m (65.62ft)	20m (65.62ft)	20m (65.62ft)	30m (98.42ft)
Day & Night	Auto (ICR)	Auto (ICR)	Auto (ICR)	Auto (ICR)	Auto (ICR)
Wide Dynamic Range	120dB	120dB	120dB	120dB	120dB
Digital Noise Reduction	SSNR	SSNR	SSNR	SSNR	SSNR
Analytics	Intelligent analytics	Intelligent analytics	Intelligent analytics	Intelligent analytics	Intelligent analytics
Alarm I/O	1 / 1	1 / 1	1 / 1	1 / 1	1 / 1
Audio I/O	Built-in mic / -	Built-in mic / -	Built-in mic / -	Built-in mic / -	Selectable (mic in/line in) / -
Video Compression	H.265, H.264, MJPEG	H.265, H.264, MJPEG	H.265, H.264, MJPEG	H.265, H.264, MJPEG	H.265, H.264, MJPEG
Resolution / Max. Frame Rate	2MP / 30fps	2MP / 30fps	2MP / 30fps	2MP / 30fps	2MP / 30fps
WiseStream	WiseStream II	WiseStream II	WiseStream II	WiseStream II	WiseStream II
Streaming	Up to 3 Profiles	Up to 3 Profiles	Up to 3 Profiles	Up to 3 Profiles	Up to 3 Profiles
Edge Storage	Micro SD/SDHC/SDXC	Micro SD/SDHC/SDXC	Micro SD/SDHC/SDXC	Micro SD/SDHC/SDXC	Micro SD/SDHC/SDXC
Application Programming Interface	ONVIF profile S/G/T, SUNAPI, Wisenet open platform	ONVIF profile S/G/T, SUNAPI, Wisenet open platform	ONVIF profile S/G/T, SUNAPI, Wisenet open platform	ONVIF profile S/G/T, SUNAPI, Wisenet open platform	ONVIF profile S/G/T, SUNAPI, Wisenet open platform
Operating Temperature	-10°C ~ +55°C (+14°F ~ +131°F)	-10°C ~ +55°C (+14°F ~ +131°F)	-10°C ~ +55°C (+14°F ~ +131°F)	-10°C ~ +55°C (+14°F ~ +131°F)	-30°C ~ +55°C (-22°F ~ +131°F) * Start up above -20°C (-4°F)
Certification	-	-	-	-	IP66, IK10
Power Consumption	PoE: Max 7.7W, typical 6W 12VDC: Max 6.5W	PoE: Max 7.4W, typical 6W 12VDC: Max 6.4W	PoE: Max 7.4W, typical 6W 12VDC: Max 6.4W	PoE: Max 7.4W, typical 6W 12VDC: Max 6.4W	PoE: Max 7.7W, typical 6W 12VDC: Max 6.5W
Dimensions (WxHxD) / Weight	Ø119.8 x 98.8mm (Ø4.72" x 3.89") 320g (0.705 lb)	Ø110.0 x 86.0mm (Ø4.33" x 3.39") 255g (0.562 lb)	Ø110.0 x 86.0mm (Ø4.33" x 3.39") 255g (0.562 lb)	Ø110.0 x 86.0mm (Ø4.33" x 3.39") 255g (0.562 lb)	Ø137.0 x 106.1mm (Ø5.39" x 4.18") 710g (1.565 lb)
Additional Features	Hallway View	Hallway View	Hallway View	Hallway View	Hallway View


Imaging Device	1/2.8" 2MP CMOS	1/2.8" 2MP CMOS	1/2.8" 2MP CMOS	1/2.8" 2MP CMOS
Min. Illumination	Color : 0.095Lux (F1.6) B/W : 0Lux (IR LED on)	Color : 0.1Lux (F2.0) B/W : 0Lux (IR LED on)	Color : 0.1Lux (F1.6) B/W : 0Lux (IR LED on)	Color : 0.1Lux (F2.0) B/W : 0Lux (IR LED on)
Video Output	CVBS 1.0Vp-p	CVBS 1.0Vp-p	CVBS 1.0Vp-p	CVBS 1.0Vp-p
Focal Length	3.2~10mm (3.1x) manual varifocal	6mm fixed	4mm fixed	2.8mm fixed
Angular Field of View	H: 109.0°(Wide)~33.2°(Tele) / V: 57.4°(Wide)~18.7°(Tele) / D: 132.0°(Wide)~38.0°(Tele)	H: 52.8°/V: 30.3°/D: 60.4°	H: 87.6° / V: 46.4° / D: 104.5°	H: 113.74° / V: 61.5° / D: 134.45°
Pan / Tilt / Rotate	0°~350° / 0°~67° / 0°~355°	0°~350° / 0°~67° / 0°~355°	0°~350° / 0°~67° / 0°~355°	0°~350° / 0°~67° / 0°~355°
IR Viewable Length	30m (98.42ft)	30m (98.42ft)	25m (82.02ft)	20m (65.62ft)
Day & Night	Auto (ICR)	Auto (ICR)	Auto (ICR)	Auto (ICR)
Wide Dynamic Range	120dB	120dB	120dB	120dB
Digital Noise Reduction	SSNR	SSNR	SSNR	SSNR
Analytics	Intelligent analytics	Intelligent analytics	Intelligent analytics	Intelligent analytics
Alarm I/O	1 / 1	1 / 1	1 / 1	1 / 1
Audio I/O	Selectable (mic in/line in) / -	Selectable (mic in/line in) / -	Selectable (mic in/line in) / -	Selectable (mic in/line in) / -
Video Compression	H.265, H.264, MJPEG	H.265, H.264, MJPEG	H.265, H.264, MJPEG	H.265, H.264, MJPEG
Resolution / Max. Frame Rate	2MP / 30fps	2MP / 30fps	2MP / 30fps	2MP / 30fps
WiseStream	WiseStream II	WiseStream II	WiseStream II	WiseStream II
Streaming	Up to 3 Profiles	Up to 3 Profiles	Up to 3 Profiles	Up to 3 Profiles
Edge Storage	Micro SD/SDHC/SDXC	Micro SD/SDHC/SDXC	Micro SD/SDHC/SDXC	Micro SD/SDHC/SDXC
Application Programming Interface	ONVIF profile S/G/T, SUNAPI, Wisenet open platform	ONVIF profile S/G/T, SUNAPI, Wisenet open platform	ONVIF profile S/G/T, SUNAPI, Wisenet open platform	ONVIF profile S/G/T, SUNAPI, Wisenet open platform
Operating Temperature	-30°C ~ +55°C (-22°F ~ +131°F) * Start up above -20°C (-4°F)	-30°C ~ +55°C (-22°F ~ +131°F) * Start up above -20°C (-4°F)	-30°C ~ +55°C (-22°F ~ +131°F) * Start up above -20°C (-4°F)	-30°C ~ +55°C (-22°F ~ +131°F) * Start up above -20°C (-4°F)
Certification	IP66, IK10	IP66, IK10	IP66, IK10	IP66, IK10
Power Consumption	PoE: Max 7.7W, typical 6W 12VDC: Max 6.5W	PoE: Max 7.4W, typical 6W 12VDC: Max 6.4W	PoE: Max 7.4W, typical 6W 12VDC: Max 6.4W	PoE: Max 7.4W, typical 6W 12VDC: Max 6.4W
Dimensions (WxHxD) / Weight	Ø137.0 x 106.1mm (Ø5.39" x 4.18") 710g (1.565 lb)	Ø120.3 x 91.7mm (Ø4.74" x 3.61") 510g (1.124 lb)	Ø120.3 x 91.7mm (Ø4.74" x 3.61") 510g (1.124 lb)	Ø120.3 x 91.7mm (Ø4.74" x 3.61") 510g (1.124 lb)
Additional Features	Hallway View	Hallway View	Hallway View	Hallway View

Accessory Configuration


Dome

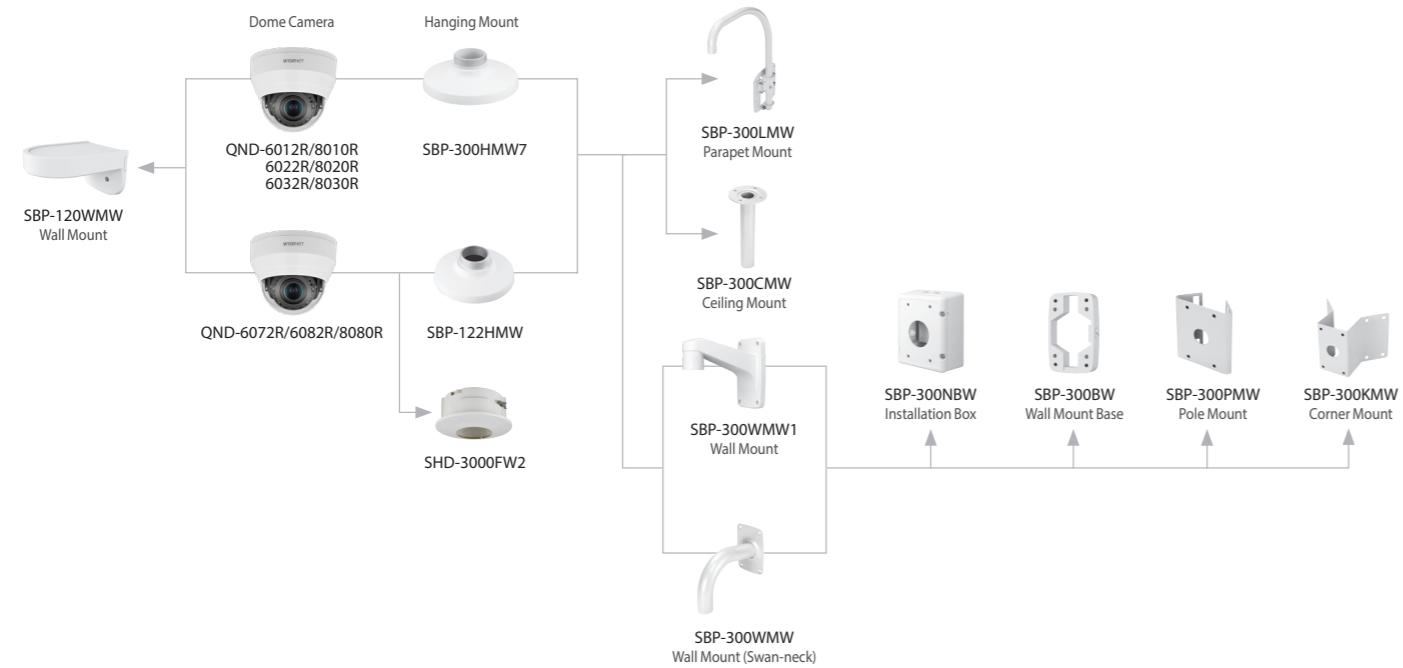

Bullet

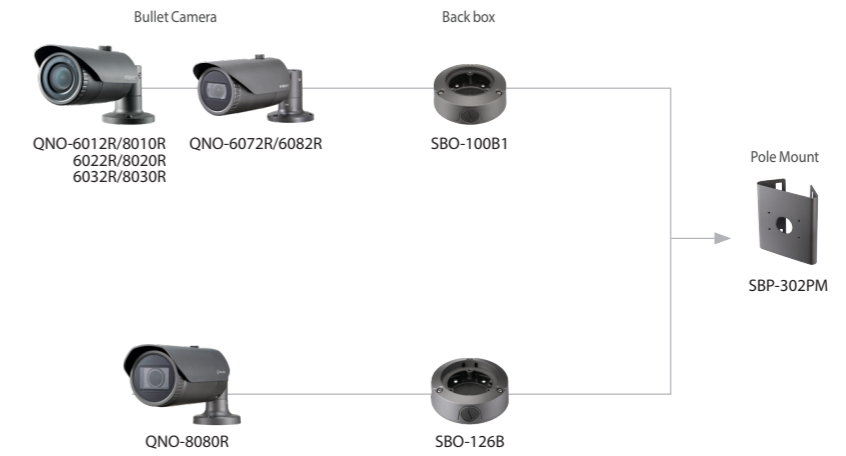

Vandal

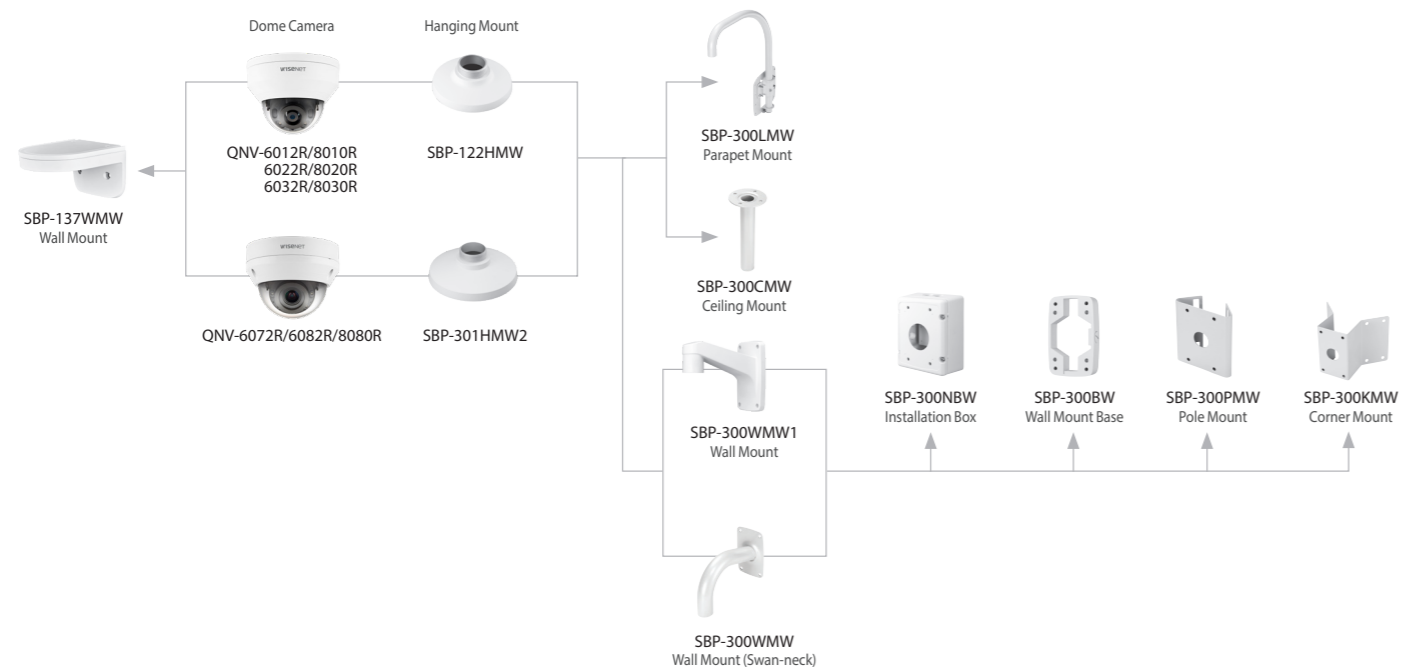

Flateye



